


KSD-9018



SIZE: 150X150X225cm

Cautions in Installation and Using

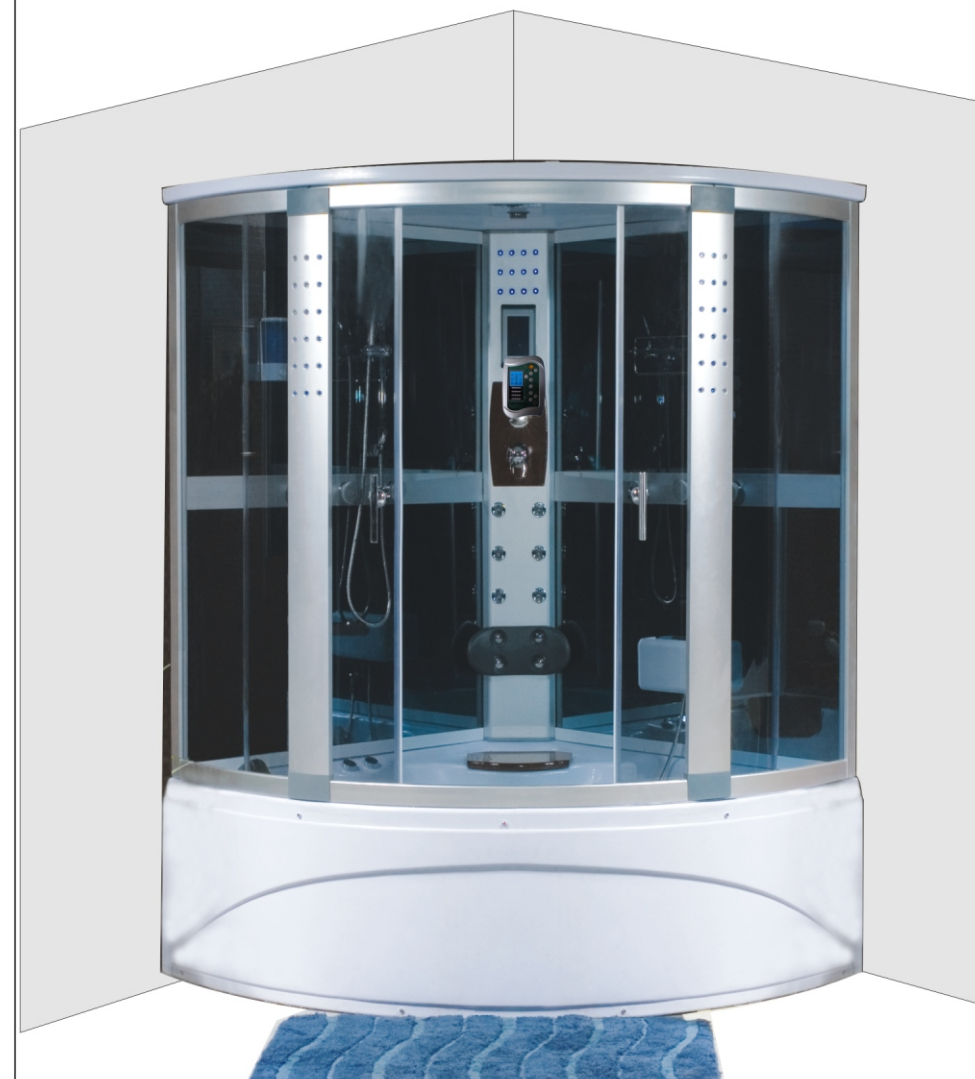







Thanks for selecting our shower room series. To guarantee safe and normal operation as well as prolong service lifetime. Pls read Instruction carefully before installation.

Note: Constar is dedicated to improving products quality, find something new in what is old, we would if there is difference in the Instruction until further notice. Any discomfort, we ask your pardon.














Directory

1. Tool contents	-----	3
2. Accessory list	-----	4-6
3. Pipe and drain installation drawing	-----	7
4. Installation Procedure	-----	8-19
5. Electric appliance instruction	-----	20-21
6. Notes	-----	22
7. Delivery and storage notice	-----	22
8. Trouble shootings	-----	23

1. self-provide tool














Name	Tool
Track level bar	
Tape measure	
Ajustable spanner	
Rubber hammer	
Phillips screwdriver	
Scissors	
Glass cement	
electric drill	
3mm aiguille	
6mm aiguille	
tap drill	

2.Partial accessory list

Item	Name	Accessory	Quantity
1	(1) Tub		1
2	(2. 1) Left Backboard		1
	(2. 2) Middle backboard		1
	(2. 3) Right backboard		1
3	(3) Roof		1
4	(4. 1) Upper rail		1
	(4. 2) Bottom rail		1
	(4. 3) Side upright column		2
	(4. 4) Middle upright column		2
5	(5. 1) Arch fixed door glass		2
	(5. 2) Arch flexible door glass		2
	(5. 3) Knob		2
6	(6) Glass positioning fixture		8




(4)

2.Partial accessory list

Item	Name	Accessory	Quantity
7	(7) eccentric wheel		8
8	(8) foot massage device		1
9	(9. 1) Handshower		1
	(9. 2) hand shower tube		1
10	(10) Lifting rod		1
11	(11) Big Handle		1
12	(12. 1) Magnetic strip		2
	(12. 2) Waterproof belt		2
	(12. 3) U style thong		4
13	(13) Top shower		1
14	(14. 1) St4x60mm Screw		8
	(14. 2) St4x16mm Screw		10
	(14. 3) St4x10mm Screw		22

(5)

2. Partial accessory list

Item	Name	Accessory	Quantity
15	(14) Shelf		1
16	(15) Hot&cold water pipe		2
17	(16) Soap holder		1

(6)


3. Pipe and drain installation drawing

Demension: 150*150*220cm

C=Cold water inlet


H=Hot water inlet

D=Drain

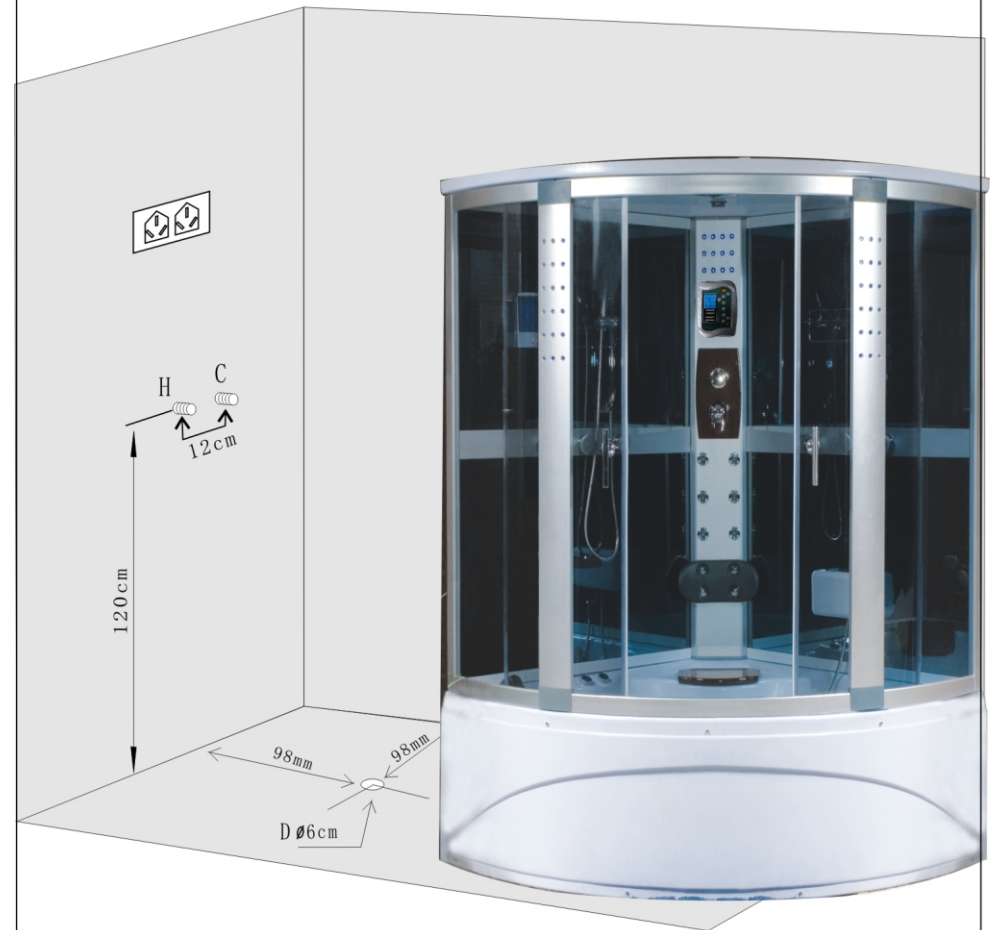


(7)

4. Installation Procedure




Lace the base on a solid floor and adjust the feet so that it is level. Check carefully using a spirit level. Remove film before installation.

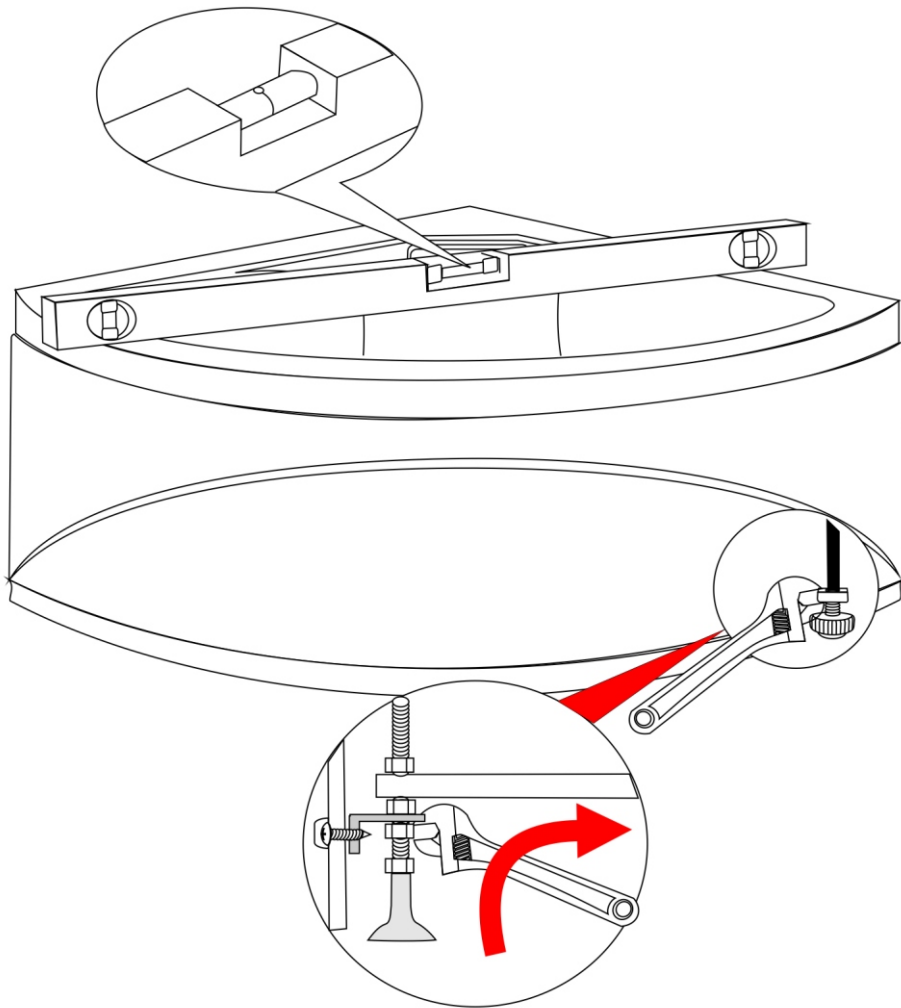


(8)

4. Installation Procedure

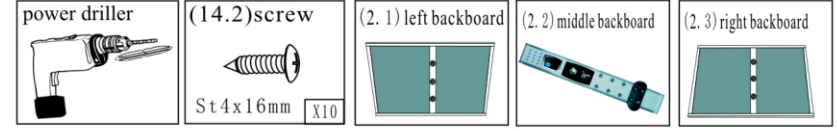


Lace these 3 backboard upright, and make them suitable. Connect them by screw ST4*16mm.

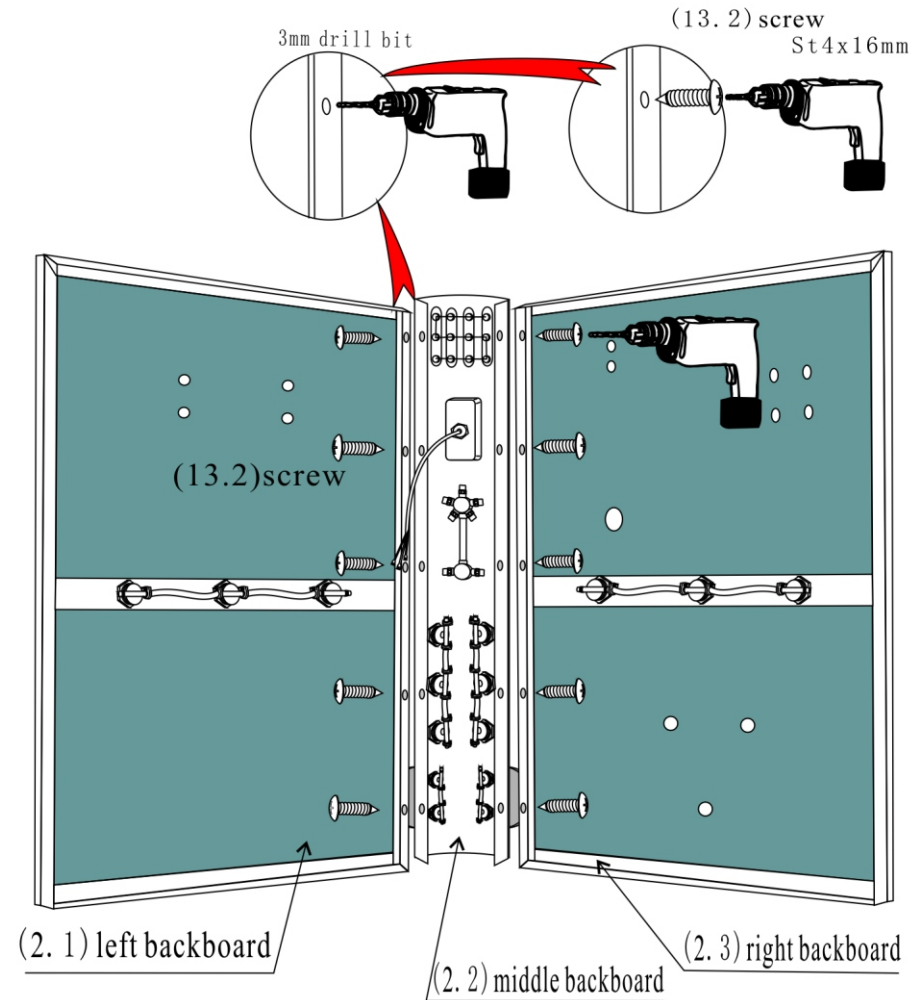


(9)

4.Installation Procedure




Fit these 3 items as picture.

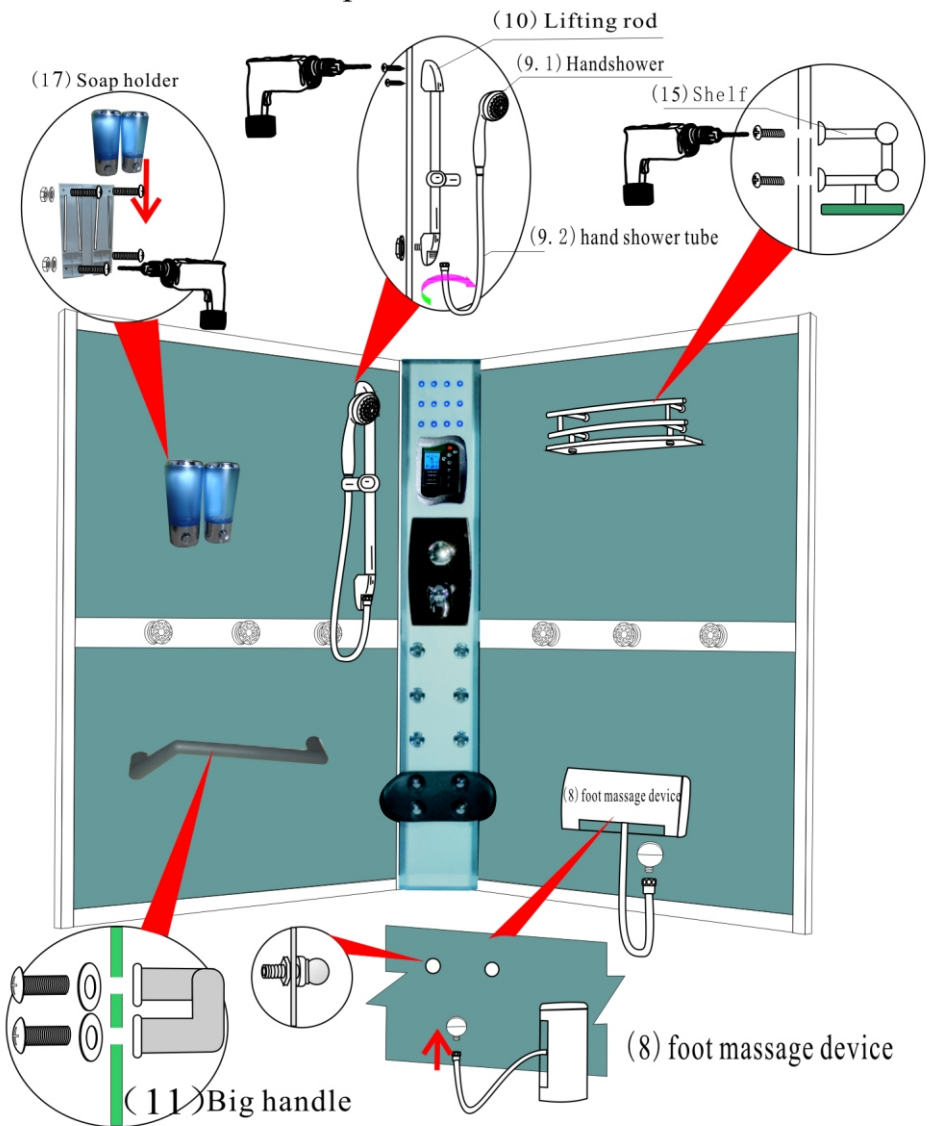


(10)

4.Installation Procedure

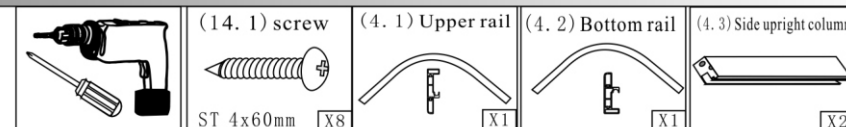


Identify 4.1 and 4.2. Connect them with side upright column. Then

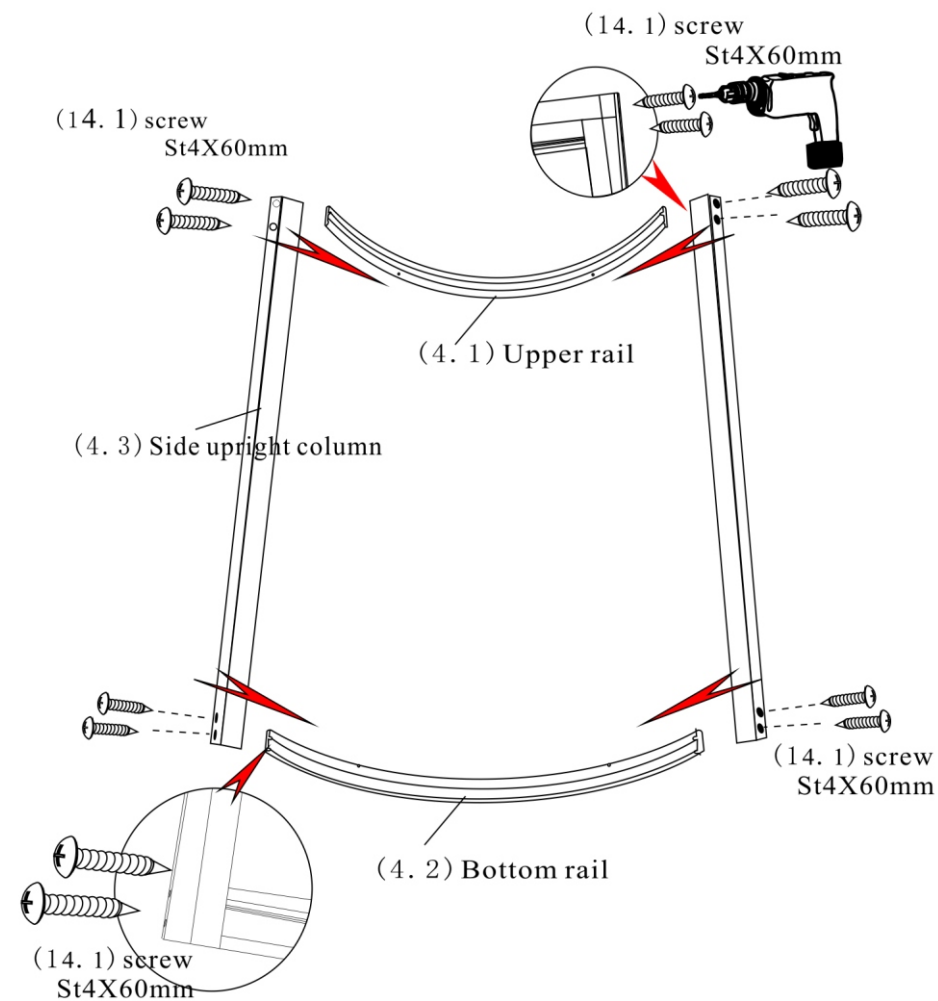


(11)

4.Installation Procedure




Set (12.3)U style thong into glass(5.1)as picture.Put the arch fixed glass on the rails,and use rubber hammer to hit the glass into the curve of side upright column.

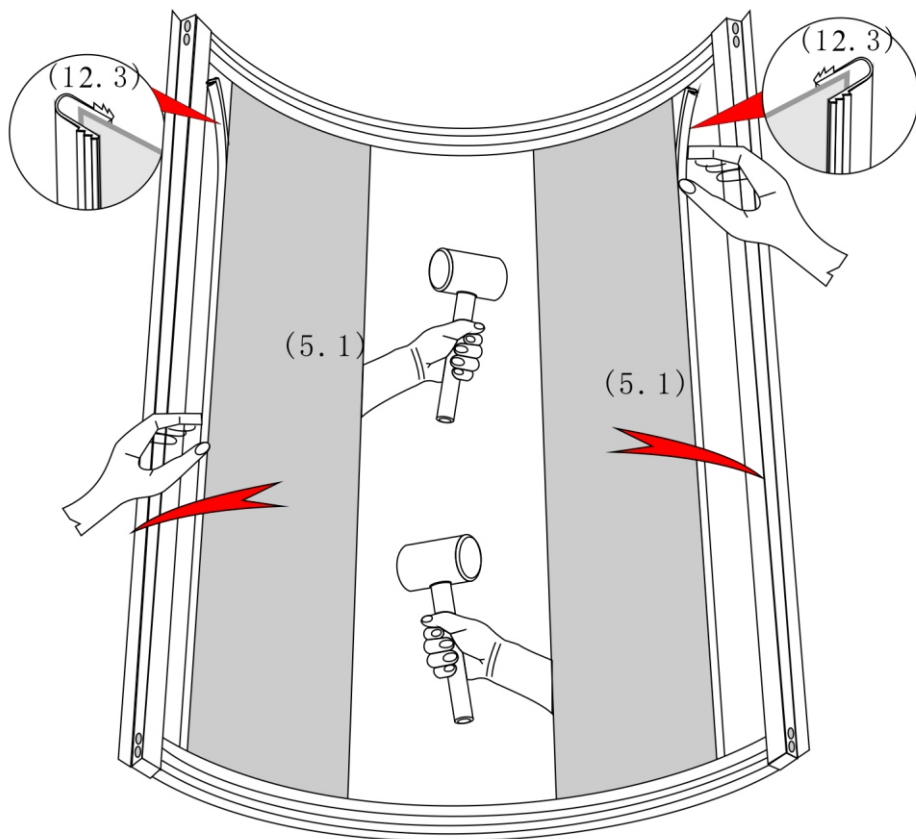


(12)

4.Installation Procedure

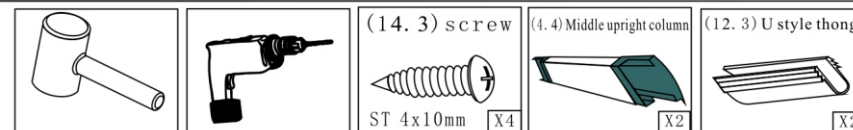


Set the middle upright column(4.4)to connect with fixed glass other sides.Fix middle upright column by screw ST4*10mm(14.3).

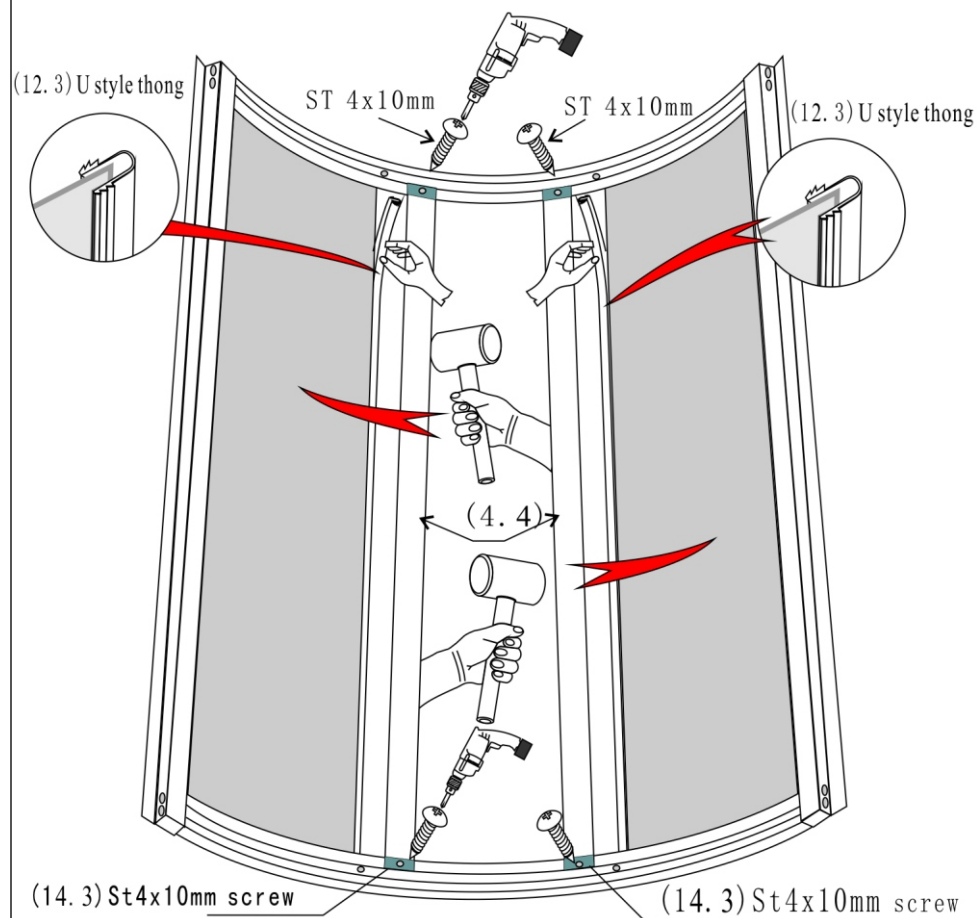

(13)

4.Installation Procedure

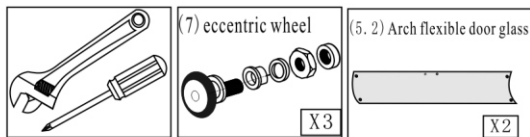


Set eccentric wheel(7)into arch flexible door glass topmost holes.Fix the wheel and hang the door up into rails, and fit the wheel into bottom holes then,and adjust the wheel by spanner,to make the door go and back smoothly.




(14)

4.Installation Procedure

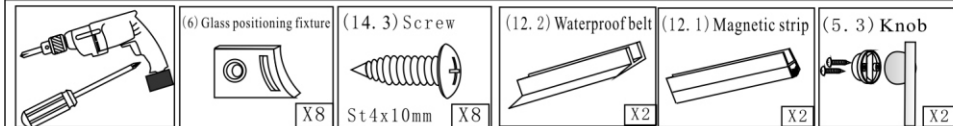


Fit the knob(5.3),and fix it by its own screws.Fix the glass positioning fixture(6)by screw ST4*10mm. Set the magnetic strip(12.1) and waterproof belt on the door.

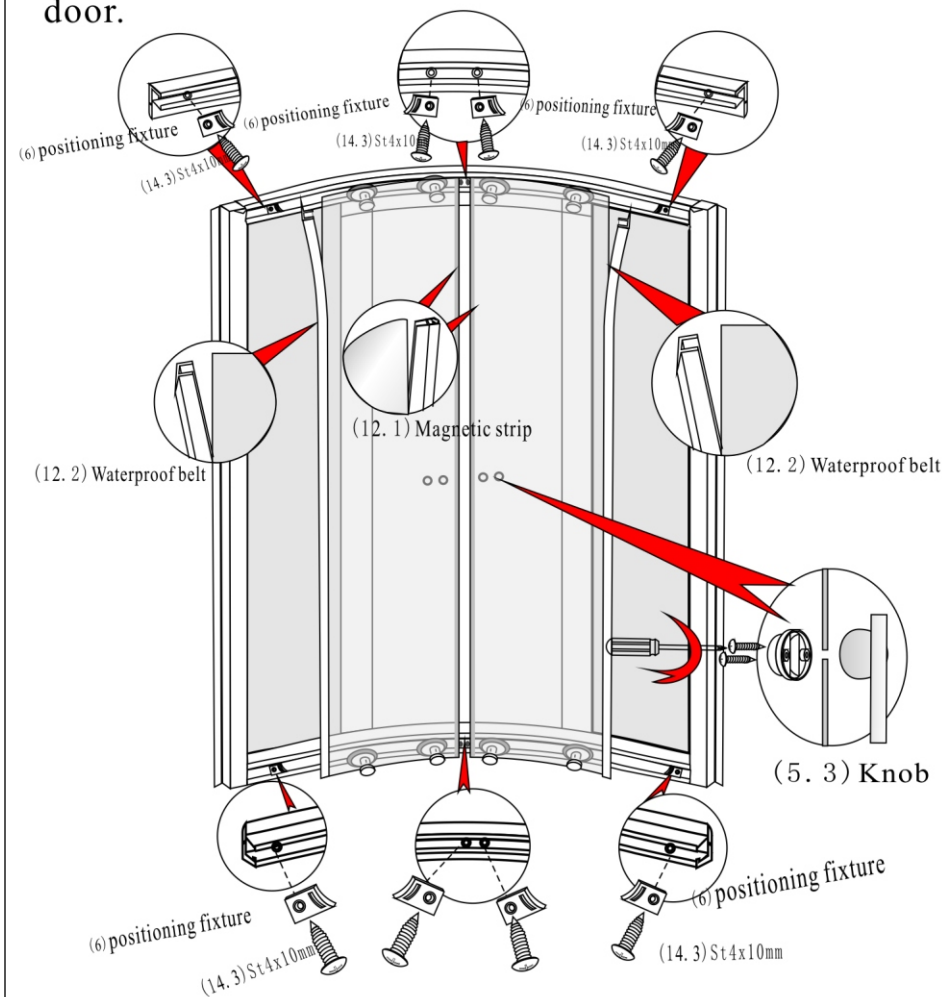


(15)

4.Installation Procedure




Gather glass room and back board, and make them the same level, and then fix them by (14.2)screw ST1*16mm. Connect the water pipes as the label.

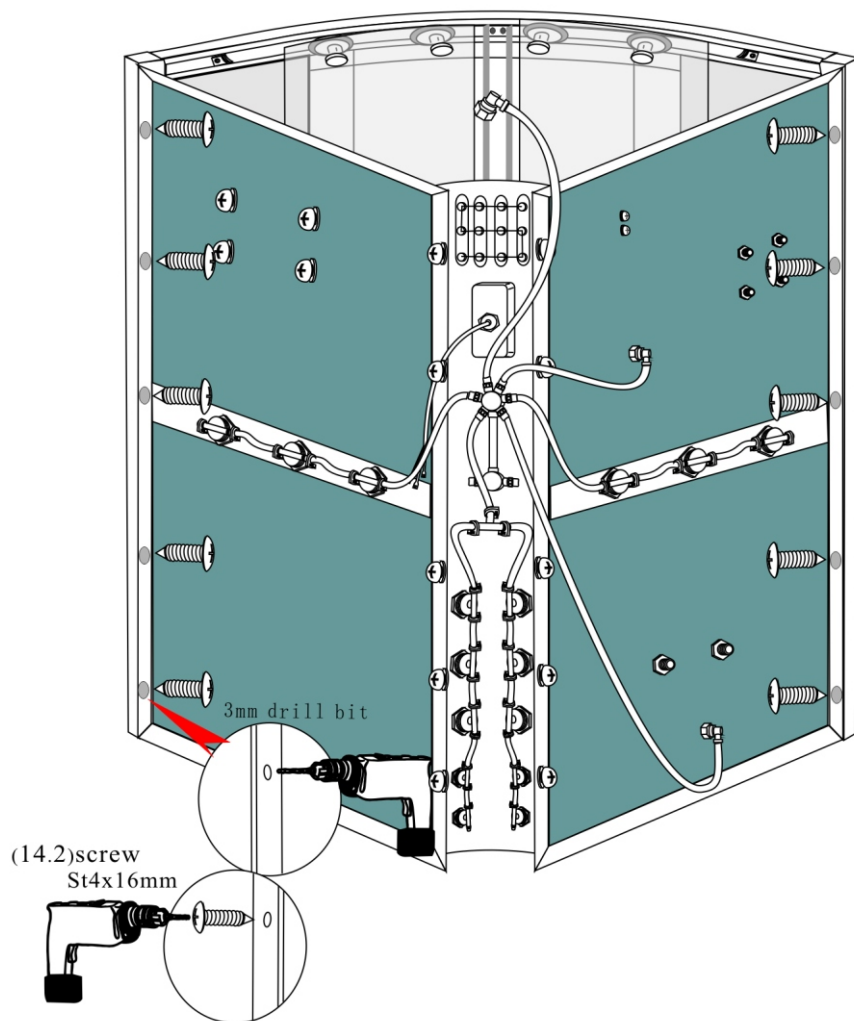


(16)

4.Installation Procedure




Lace the finished glass room onto tub, adjust its position to fit it with tub. Drill hole by power drill with diameter 3mm drill head. Then fix the connection by screw ST4*16mm.

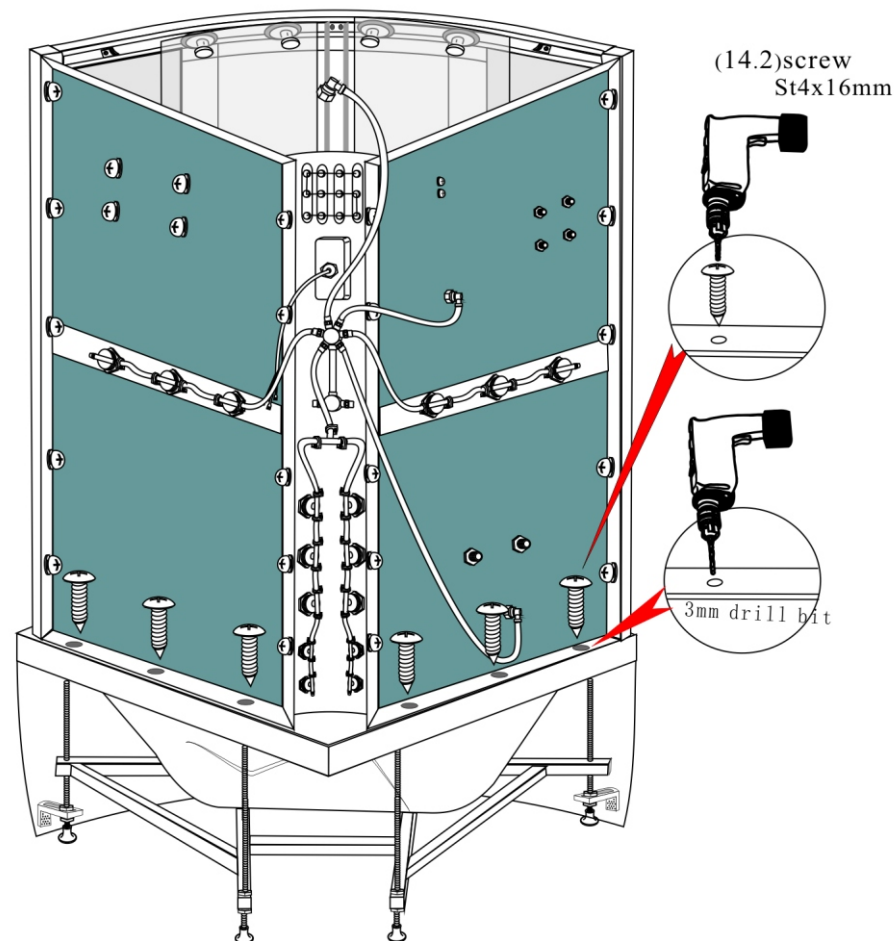


(17)

4.Installation Procedure

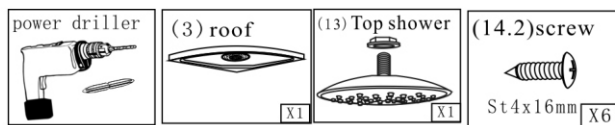


Put roof onto the glass room, and Drill hole by power drill with diameter 3mm drill head. Then fix the connection by screw ST4*16mm.

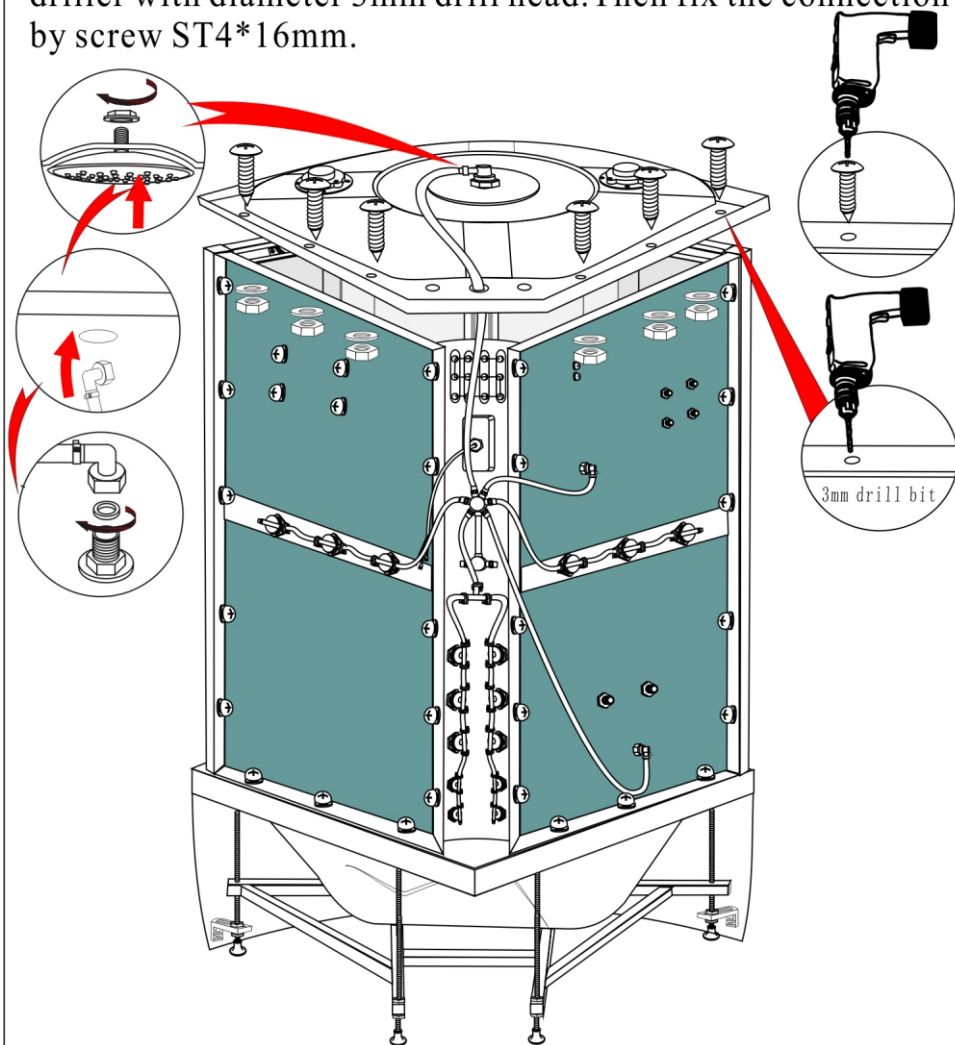


(18)

四:安装过程



Connect fan, speaker, and other electronics as labels. Connect (16) Hot&cold water pipes and use adjustable spanner to make it tight. Then make power on.

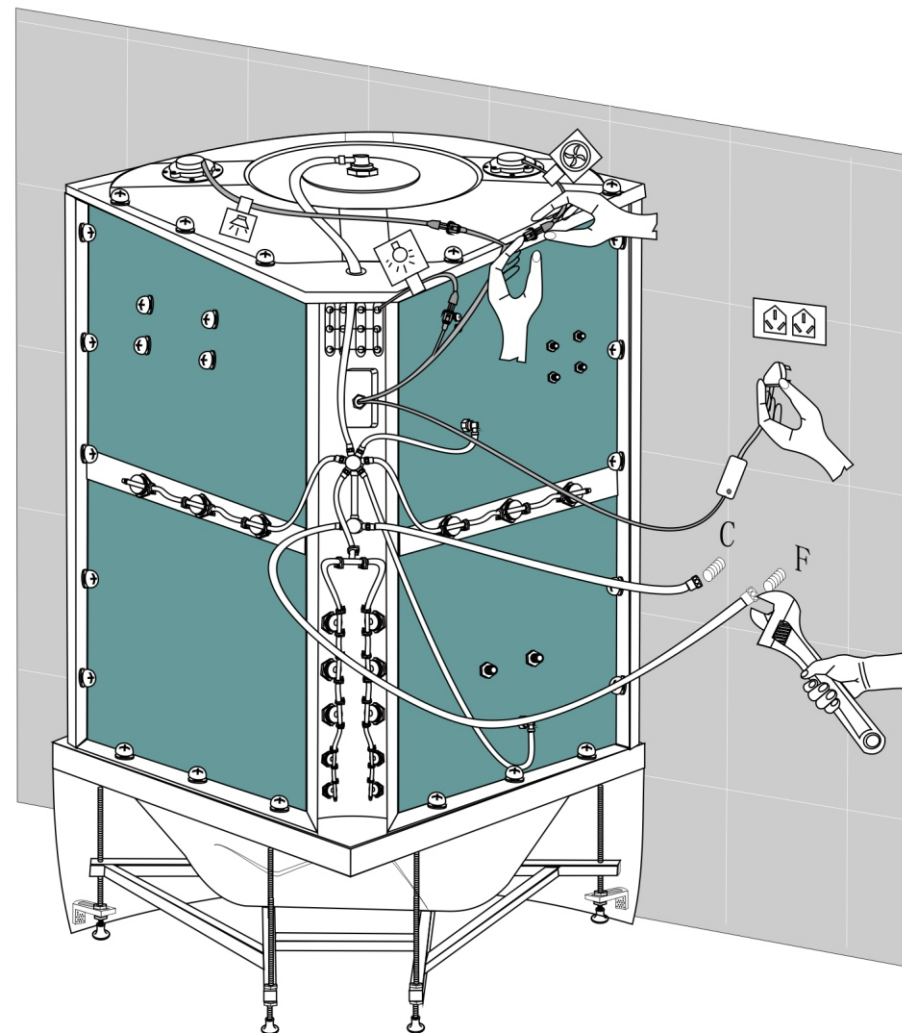

(19)

5 Electric appliance instruction

The electrical things used in the product all have the electrical leakage protection and are connected to the ground wire. During installation professional workers should be responsible for it.

Voltage: 220V+10%

Water pressure: 0.1-0.4Mpa



Power line section must be above 2.5mm, it must have dependent power control switch. Power plug's dimension is three-core 16A, We would be responsible for product quality if you install and operate according to instruction.





Control panel instruction







5 Electric appliance instruction



1、Please power the controller first. After you push any position of the touch screen, the LCD screen will be light, and the controller is ready for working.

2、Push  'FAN' key, fan icon flash, the fan working, you can push  'FAN' key again to stop fan working.

3、Push  'Top Light' key, the top lamp light, you can push  'Top Light' key again to stop top lamp working. Push  'Back Light' key, the back lamp light, you can push  'Back Light' key again to stop back lamp working.

4、Push  'FM' key on the panel once, the radio working, the number window show the current radio frequency. Push  'FM' key again, radio turn off.

5、Volume setting: when radio is operation, push  'Volume up' or  'Volumedown' key to set up volume, push the key after 3 seconds later, the volume continuously up or down.

6、Finish washing, push  'POWER' key to turn off the controller. At this time, the LCD screen display count down for 60 second, the controller automatic turn off the Fan, Light, Radio, CD. The controller will stand again after 60 second. You can push  'POWER' key to restart the controller.

5 Electric appliance instruction

Parameter:

Voltage Inlet	AC 210-230V
Frequency	50HZ
Control System Voltage	DC 12V
Lamp Power	AC 12V,10W
Fan Power	DC 12V,2W
Radio Power	5W

6: Notes

1. It is unadvisable to take a shower after drunk.
2. It is unadvisable to have a shower immediately after acute sports.
3. Please avoid bath or shower in morning.
4. Keep the temperature of dressing room near to the bathroom's
5. If you feel uncomfortable while having a shower, you should go out of the shower room as soon as possible.
6. The time of shower is advisable to be between 15 minutes and 20 minutes, no longer.
7. Drink water to supplement moisture after shower or bathing.
8. People who suffer from heart disease, high blood pressure, diabetes or who feel unwell or pregnant woman are unadvisable to have bathing, massage or shower.

7, Delivery and storage notice

1. It is prohibited to store organic solvent together, such as formic acid and methanol.
2. Handle with care if it need transport. Heavy stress, mechanical impact and sharp pounding is prohibited.
3. It should keep it dry and airy and make sure there is no etchant gas.

8, Trouble shootings

Troble	Cause	Remedy
No power	1. Electric power don't connect well, leak switch is cut off.	Access to power
	2. Fuse wire is broken, switch of control panel is failure.	Maintain or replace
	3. GFCI is out of work	Check GFCI
No head shower	1. water pressure is abnormal	Check water pressure
	2. Cold and hot water switch is closed.	Turn on the cold and hot water switch
	3. chocking nozzle	Clean
Water pipe leakage	1. Seal ring damaged	Replace seal ring
	2. Tie in don't connect well	Connect it again
No radio	1. Connecting wire is cut	Make connection
	2. Loudspeaker is broken	Replace a new one
Phone unuable	1. Telephone wire don't connect well	To make contact telephone line
	2. Control panel is broken	Maintain or replace
No light	1. Bulb is broken, ballast is broken	Replace
	2. Break of ballast	To make contact
	3. Control panel is broken	Maintain or replace
No exhaust	1. Fan is broken	Replace
	2. Tie-in is not connect well	To make contact
	3. Control panel is broken	Maintain or replace

If complete shower room cant work normally, please check it as compare above then obstacle avoidance.
If customers cant make sure the cause of obstacle or lack of ability mantianance. Please contact distributer.