




HOT-TUB ASSEMBLY INSTRUCTIONS




1. Floor

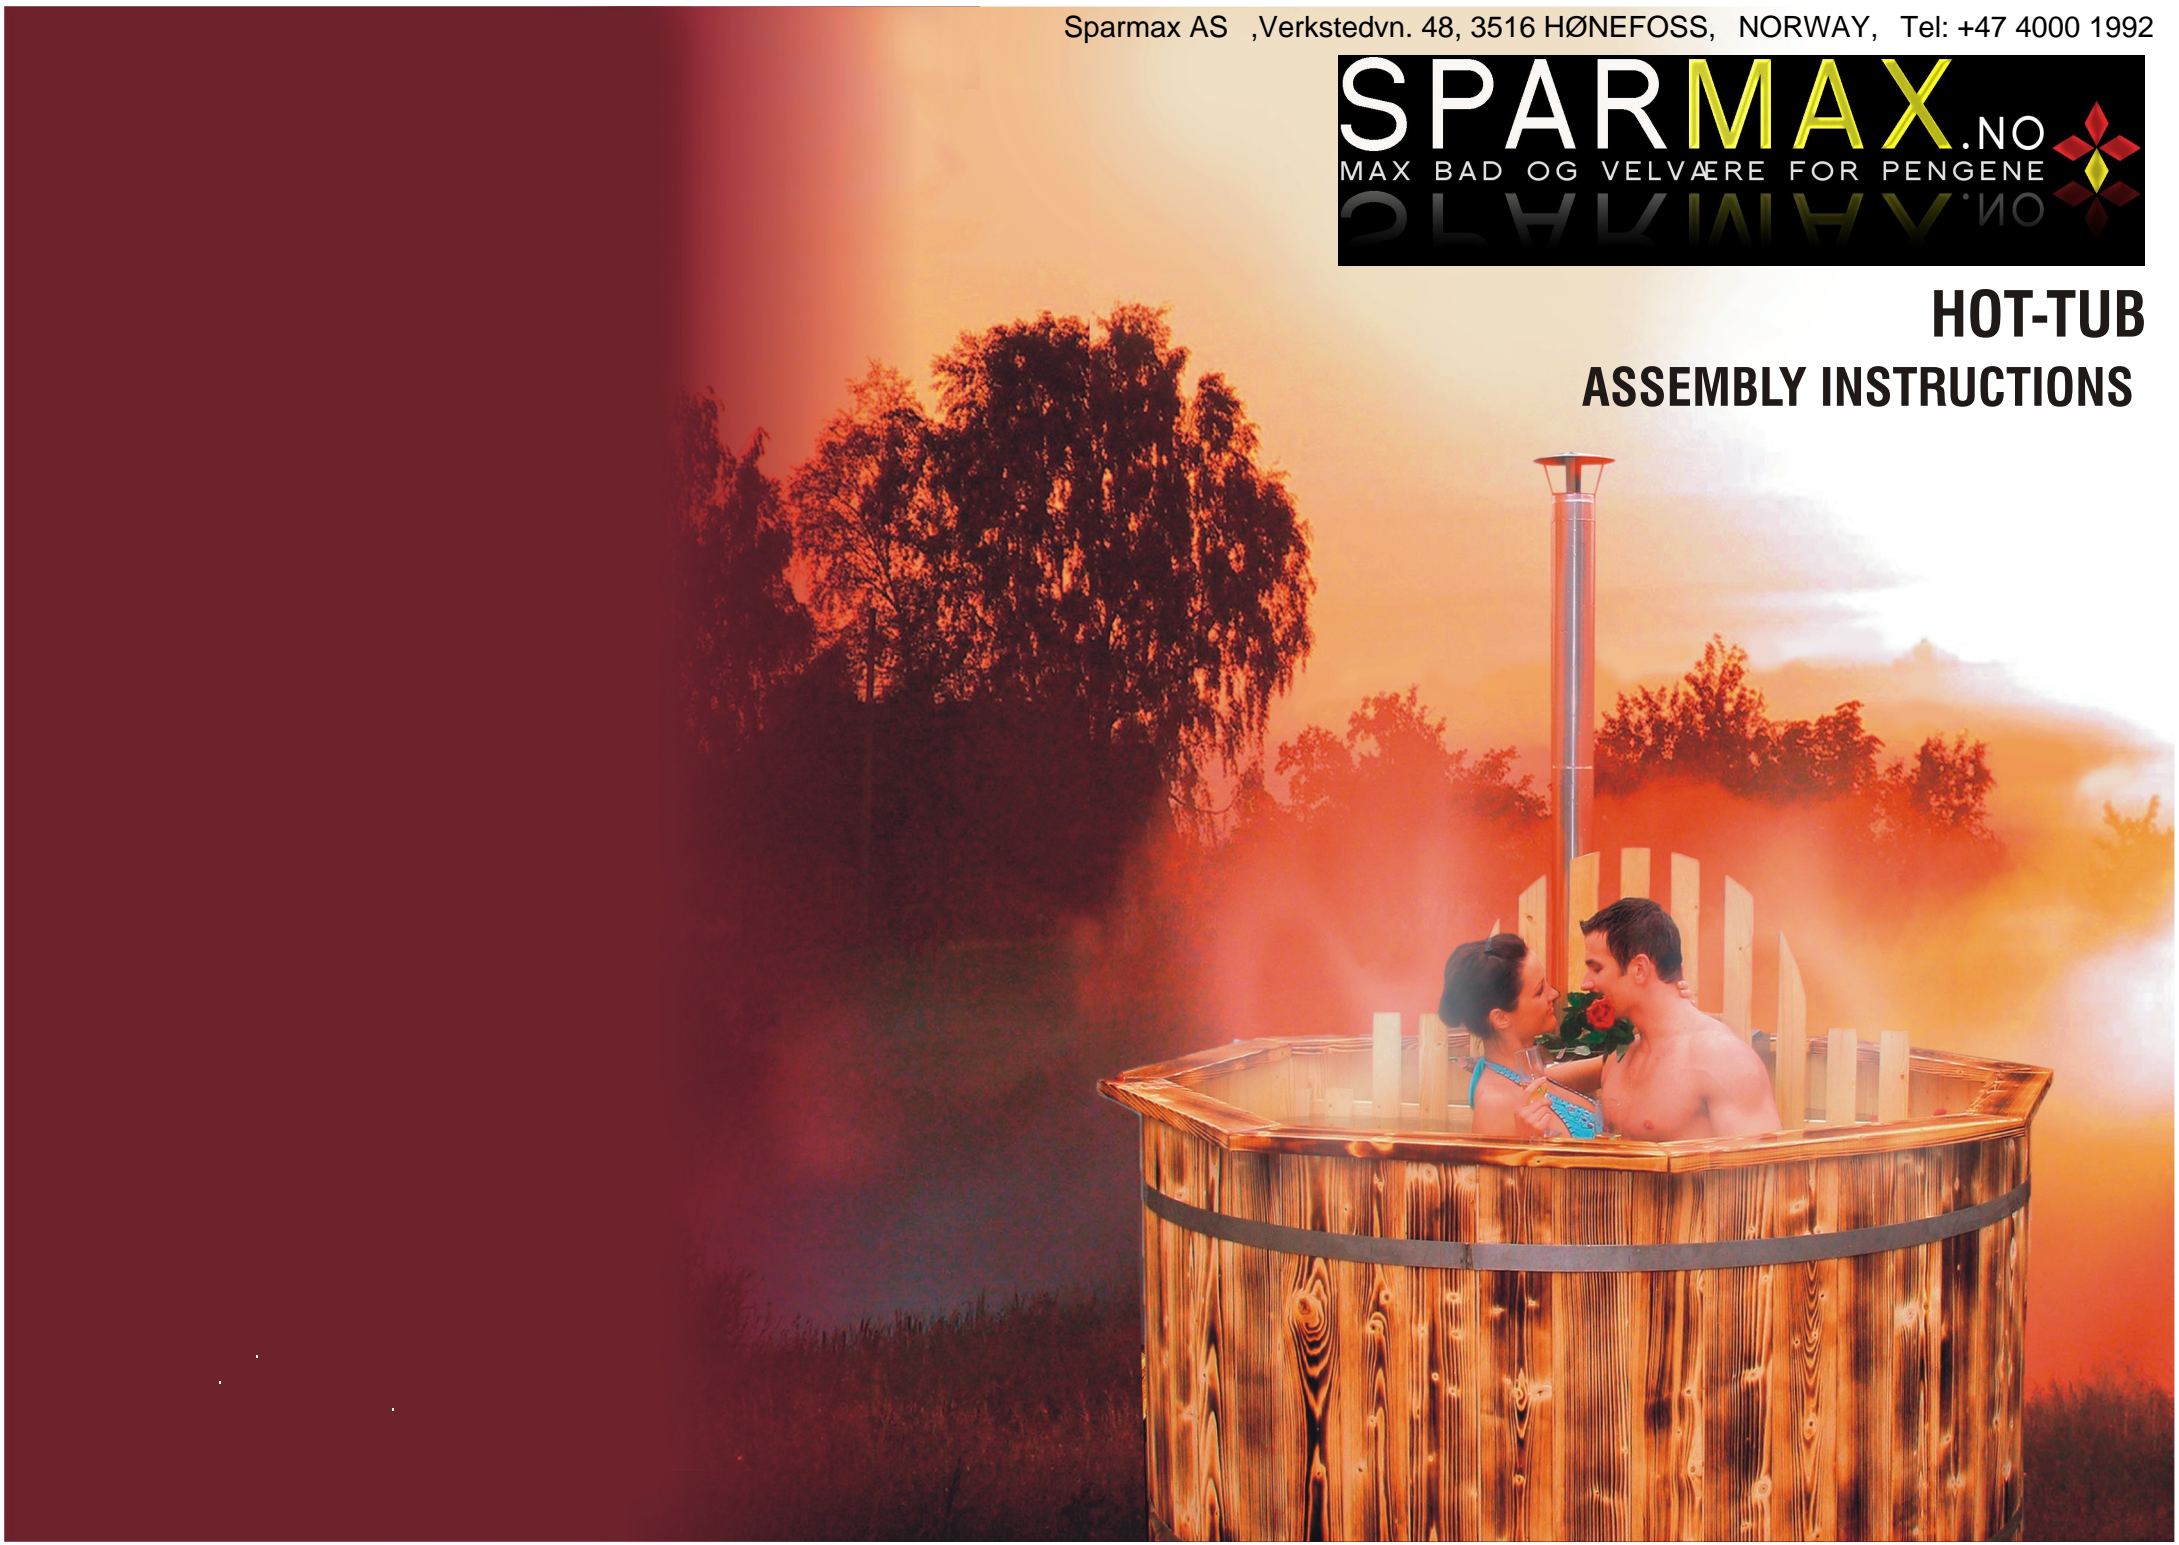

1



Attach together the two floor parts as shown on the picture below. Put the plates down and throb lightly with hammer from the outside to ensure proper attachment.

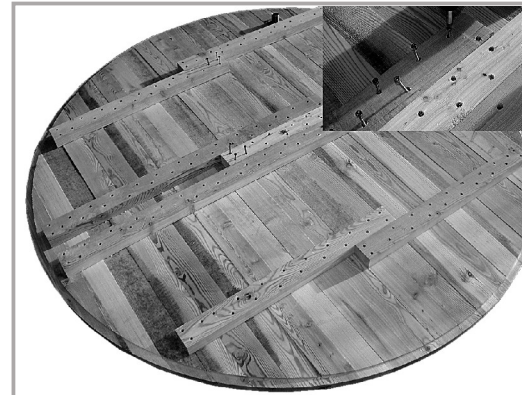

Afterwards screw the plank together with the floor so that the floor become a big plate.



Then put floor on surface which resist water or other materials, so that the floor doesn't come in contact with ground. Bottom should sustain weight of 2500 kg. Make sure the floor is even.

2

2.Wall



Stack the staves one after one. New stave always pile to the old one without pushing it down to the floor.



If some of the staves are tightly fixed, you should need slightly to use a hammer. The last two staves should be fixed together. Go round the hot-tub and strike/push all side staves into their place (rubber hammer recommended).

3.Tightening band



Drop the band over the top, lower it into proper position and strain the crew-nuts a little so that the band does not fall off. Use one of the bands to surround the hot-tub. Brace the ends with each other by putting a bolt through and fix screw-nuts on each side. The band should be braced 15 cm above the wall (compare with floor). Other band should be braced 30 cm from the top and bottom. Don't brace the bands until both bands are

3.Tightening band




fixed. Brace bands after some time repeatedly. Throb the wall staves with a hammer to make bracing jobs easier. The inside fence footing should be placed right by the inside fence and marked or screwed as shown below.

4. Assembling of inside fence

Assemble inside fence according to the holes for screws. Put one of the two fastening planks down to make measuring easier as shown in the picture below at the right. Then firmly screw inside fence.



Fix the inside fence in the bath tub across the wall planks and right by the edge, so that it naturally stops in wall planks on both sides of the inside fence.

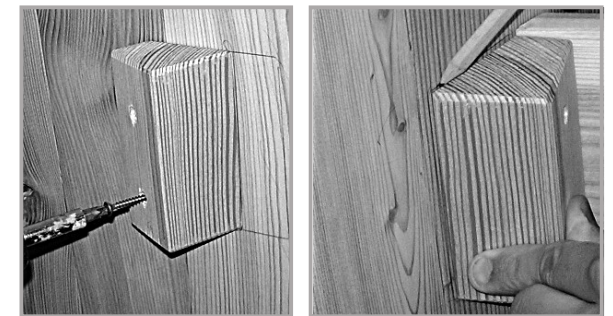

5. Assembling the stove



The stove should be fixed right by the edge of the hot-tub across the floor planks. Then the inside fence should be placed in the hot-tub so that the stove stand in the middle between the inside fence and the wall. The stove should be

attached at least 5 cm away from all edges. Then both of the plates should be fixed with the legs to the floor as shown on the picture below. The stove legs should be pushed right to these plates and the last leg should be screwed locally.

6. The bench seats



Put the planks in the hot tub as shown in picture. Screw them tight to legs according to screw holes in planks. Screw tight one bench after another in a circle in the hot tub.

5


7. Top side

Fix the top side. Place the first one to fit with the back side of the stove and place other next to it. Screw tight all the planks.



8. The buttress

The buttress need screw tight in all eight corners, look at the photo. Then the top wood totally around keeps tight and looks more exclusive. Hot tub is assembled!

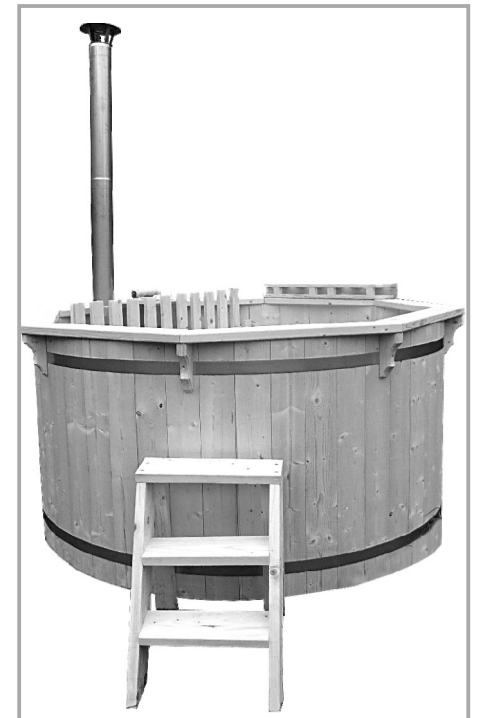

6